

LR-1500 UNDERSINK LEAD FILTRATION SYSTEM



APPLICATIONS

Residential

FEATURES • BENEFITS

- Professional grade lead reduction drinking water system
- NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means
- Full flow technology means no separate faucet required
- Complete system with wrench, integrated mounting bracket, and manual

INSTALLATION TIPS

- Choose a mounting location suitable to support the full weight of the system when operating.
- Make sure to properly lubricate o-ring prior to use.
- Use 3/8" quick connect water line.
- Install vertically with bowl hanging down.
- ◆ Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

OPERATION TIPS

- Replace cartridge if flow rate decreases.
- Do not exceed service flow rate.
- Inspect o-ring during each cartridge change.
 Lubricate and/or replace if necessary.


SIZING

Service Flow Rate: Maximum 2.5 gpm

INCLUDES

- 10" standard filter housing with integrated mounting bracket cap
- 10" Filter cartridge
- Wrench
- Installation kit
- Installation and operation manual

LR-1500 UNDERSINK LEAD FILTRATION SYSTEM

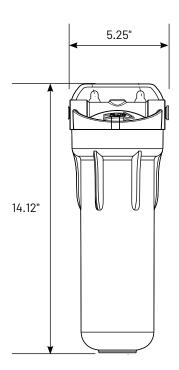

SPECIFICATIONS

- System (Model/Part No.) LR-1500 / 160406
- Housing Size
 10" Standard
- Inlet Size
 3/8" QC
- Housing Material Polypropylene
- Length 14.12"
- Width 5.25"
- Cartridge Type
 Fibredyne[§] Carbon Block
- Micron Rating0.5

- Filter Life*1 Year
- Capacity1500 gallons
- Flow Rate 2.5 gpm*
- Certification NSF/ANSI Std. 53
- ◆ Pressure Range 40-125 PSI
- ◆ Temperature Range 40° - 100°F
- Replacement Cartridge (Model/Part No.) LR-FB10 / 655208-43 (12/case)
- * Depending on faucet limitations.



System Tested and Certified by NSF International against CSA B483.1 and NSF/ANSI Standard 53 for the reduction of Lead and Cyst.

EPA # 090375-MEX-001



13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States
P: 262.238.4400 | Customer Care: 800.279.9404 | tech-support@pentair.com | pentair.com